



Development of Combined Carbon Capture and Conversion (quad-C) Systems for the Utilization of Atmospheric CO₂


Project Manager (PM) : Prof. FUKUSHIMA Yasuhiro, Tohoku University
Contact : fuku*tohoku.ac.jp
To send an email, please change * to @ in the above email address.

Summary

Many of the chemical products around us contain carbon. For a carbon-neutral future, a shift is required in chemical production so that this carbon should be sourced predominantly from three recycling routes: from biomass, carbon fixation and end-of-life (EoL) products. In this project we develop a new CO₂ utilization process that will allow carbon to be introduced into chemical production through an energy-saving conversion route which is suitable for use with the above three carbon sources.

Strategy 1 - Taking an energy-saving conversion route: Many chemical substances contain a structure called carbonyl. There are many good examples of carbonyl-containing products around us, in resins, such as polycarbonate, polyurethane, and urea, in lithium-ion battery materials, etc. The advantage of employing a route that allows CO₂ to be used as a carbonyl source is that, by use of an appropriate catalyst, CO₂ can be incorporated into the chemical structure without the need for a carbon reduction process. This amounts to a high energy saving.

Strategy 2 – Streamlining the conversion process using DFMs: To obtain CO₂, which exists in the atmosphere at a concentration of only ~ 0.04%, a huge amount of air needs to be blown into the converter. A high recovery rate of CO₂ from the introduced air is the key to save energy, which will be carbon-free while being extremely limited in the future. We approach this challenge by upgrading membrane separation technology that was originally developed for space applications. In addition, we eliminate energy requirement for CO₂ recovery from absorbents by using a new process configuration termed Combined Carbon Capture and Conversion (quad-C) realized by Dual Function Materials (DFMs).

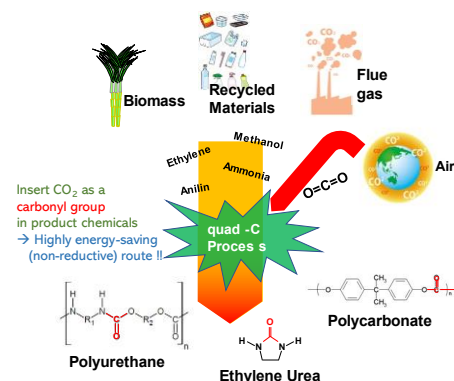

Our first target is to produce a urea derivative by bringing the ethylene diamine that chemically absorbed CO₂ into contact with the catalyst (CeO₂). The knowledge on sorption and the reaction of various DFMs and CO₂ obtained in this work, together with the new simulation and evaluation techniques we develop, will expand the range of carbonyl compounds that can be produced from CO₂ with biomass and recycled EoL products.

Targets by 2030

- FY2022: **【Confirmation of Strategy 1】** Using existing pilot plant for Direct Air Capture and storage as the benchmark, we will demonstrate that an energy saving greater than 40% is attainable, by process simulation based on our original experimental data.
- FY 2024: **【Confirmation of Strategy 2】** Using a hypothetical process that utilizes high concentration CO₂ supplied by existing Direct Air Capture pilot process for producing urea derivatives as the benchmark, we will demonstrate a twofold CO₂ emission reduction by process simulation based on our original experimental data.
- FY 2029: **【Pilot demonstration】** A pilot plant will be established for the quad-C process using diamine to produce urea derivatives, confirming abovementioned key performance indicators.

Implementation

Tohoku University, University Public Corporation Osaka (Osaka City University), Renaissance Energy Research Corporation